




T800 FULLY RUGGED TABLET

- 8.1" HD LumiBond® display for better viewing experience
- Getac proprietary SnapBack add-on featuring smart card and contactless RFID reader combo or 2nd expanded battery
- Choice of 1D/2D imager barcode reader, Serial port and LAN port (RJ45)
- MIL-STD-810H and IP65 certified
- Enhanced enterprise security with TPM2.0, Windows disk encryption



T800 3D demo

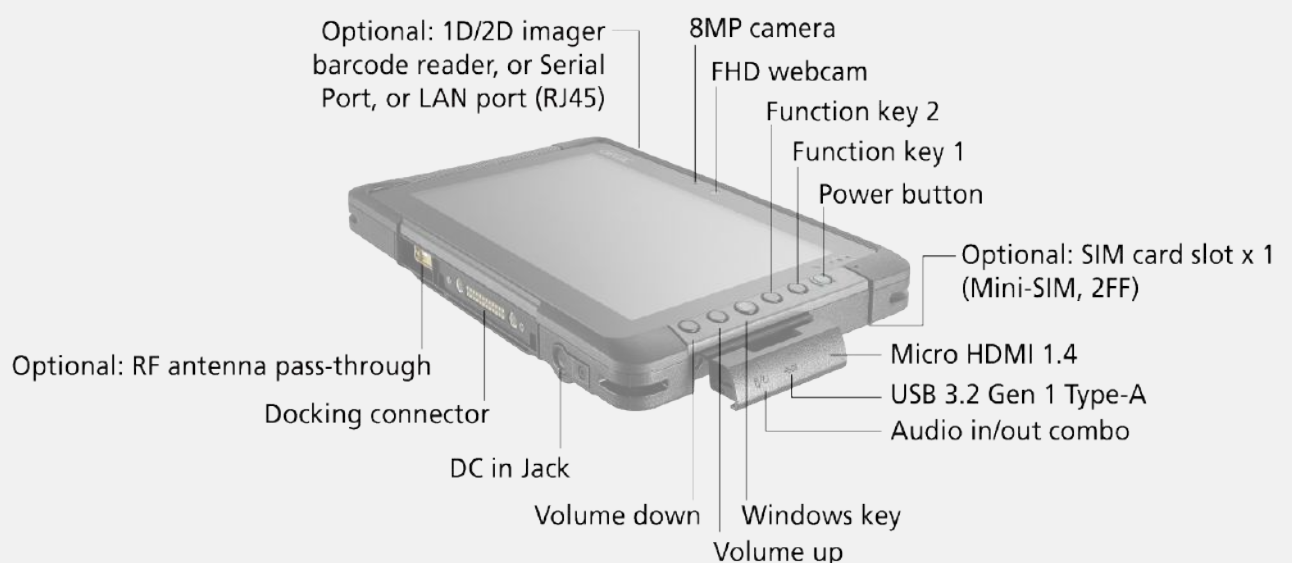

SPECIFICATIONS

운영체제
Windows 10 Proⁱ
Windows 10 IoT Enterprise

CPU
Intel® Atom Processor x7-Z8750 1.6GHz,
burst up to 2.56GHz
- 2MB Cache

그래픽 컨트롤러
Intel® HD Graphics

디스플레이
8.1" Wide Viewing Angle TFT LCD WXGA (1280 x 800)
Protection film
600 nits LumiBond® display with Getac sunlight readable technology

스토리지 & 메모리
4GB LPDDR3
옵션: 8GB LPDDR3
128GB eMMC
옵션: 256GB eMMC

키보드
Power button
5 tablet programmable buttons

포인팅 장치
Touchscreen
- Capacitive multi-touch screen
- 옵션: Dual mode touchscreen (multi-touch and digitizer)

확장 슬롯
옵션: 1D/2D imager barcode reader, Serial port, Ethernetⁱⁱ
옵션: SnapBack add-on: Smart card and HF RFID/NFC reader comboⁱⁱⁱ
옵션: SnapBack add-on: 2nd expanded batteryⁱⁱⁱ
옵션: SnapBack add-on: Smart card and magnetic stripe readerⁱⁱⁱ

I/O 인터페이스
FHD webcam x 1
8M pixels auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 1 Type-A x 1
Micro HDMI 1.4 x 1
Docking connector x 1
옵션: SIM card slot x 1 (Mini-SIM, 2FF)^{iv}
옵션: RF antenna pass-through for GPS, WWAN and WLAN

통신 인터페이스
Intel® Wi-Fi 6 AX200, 802.11ax
Bluetooth (v5.2)^v
옵션: Dedicated GPS
옵션: 4G LTE mobile broadband^{vi}
옵션: 10/100/1000 base-T Ethernet (Occupies expansion slot)

보안 기능
TPM 2.0
옵션: SnapBack add-on: Smart card and HF RFID/NFC combo reader^{iii, vi}
옵션: SnapBack add-on: Smart card and magnetic stripe readerⁱⁱⁱ

전원
AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery (7.4V, typical 4200mAh; min. 4080mAh)
LifeSupport™ battery swappable technology (only with SnapBack 2nd expanded battery)

치수 & 무게
227 x 151 x 24 mm (8.93" x 5.94" x 0.94")^{vii}
0.88kg (1.94 lbs)^{vii}

견고성
MIL-STD-810H certified
IP65 certified
MIL-STD-461G certified
Vibration & 6ft (1.8m) drop resistant^{viii}
옵션: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)^{ix}

사용가능 환경
Temperature^x:
- Operating: -21°C to 50°C / -6°F to 122°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH , non-condensing

소프트웨어
Getac Utility
Getac Camera
Getac Barcode Manager^{xi}
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
옵션: Absolute Persistence®

옵션 소프트웨어
Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility^{xiii}

악세서리
Battery (7.4V, typical 4200mAh; min. 4080mAh)
AC adapter (65W, 100-240VAC)
Capacitive stylus with tether

옵션:
Carry bag
Battery (7.4V, typical 4200mAh; min. 4080mAh)
2nd expanded battery (14.4V, 2100mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay expanded battery dock with adapter (Six-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
Office dock AC adapter (90W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen
Capacitive stylus with tether
Protection film
Hand strap
Shoulder strap (2-point)
Wrist strap
Vehicle cradle^{xiii}
Vehicle dock^{xiii}
Office dock

T800 FULLY RUGGED TABLET

- I. Windows 10 Pro is a Windows 11 Pro downgrade license. From 14th October 2025, Windows 10 is going to End of Service. Windows 10 will not be upgradable to Windows 11 and will no longer be eligible to receive Microsoft security updates.
- II. 1D/2D imager barcode reader, Serial port and Ethernet are mutually exclusive options.
- III. All SnapBack add-ons are mutually exclusive options.
- IV. Units with 4G LTE option comes with an embedded SIM card slot.
- V. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VI. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VII. Weight and dimensions vary from configurations and optional accessories.
- VIII. Drop test results vary from configurations and optional accessories.
- IX. Available with limited configurations and environment conditions.
- X. Tested by an independent third-party test lab following MIL-STD-810H.
- XI. Available when barcode reader option is selected.
- XII. Models require either embedded or standalone GPS module.
- XIII. Havis vehicle dock is e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	-
External VGA	-	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	2	4
LAN	1	1
HDMI 1.4	-	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-



(주)씨에스글로벌비즈
경기도 과천시 과천대로7길 65, 과천상상자이타워 B동 1220호
제품 문의 : 02)782-4700 / 기술 문의 : 02)782-7500
www.getac.co.kr / getac_sales@getac.co.kr